


# RESILIENT RECLAMATION STAGING GUIDELINES

## ECOWORX RESILIENT & SHAW MANUFACTURED RESILIENT

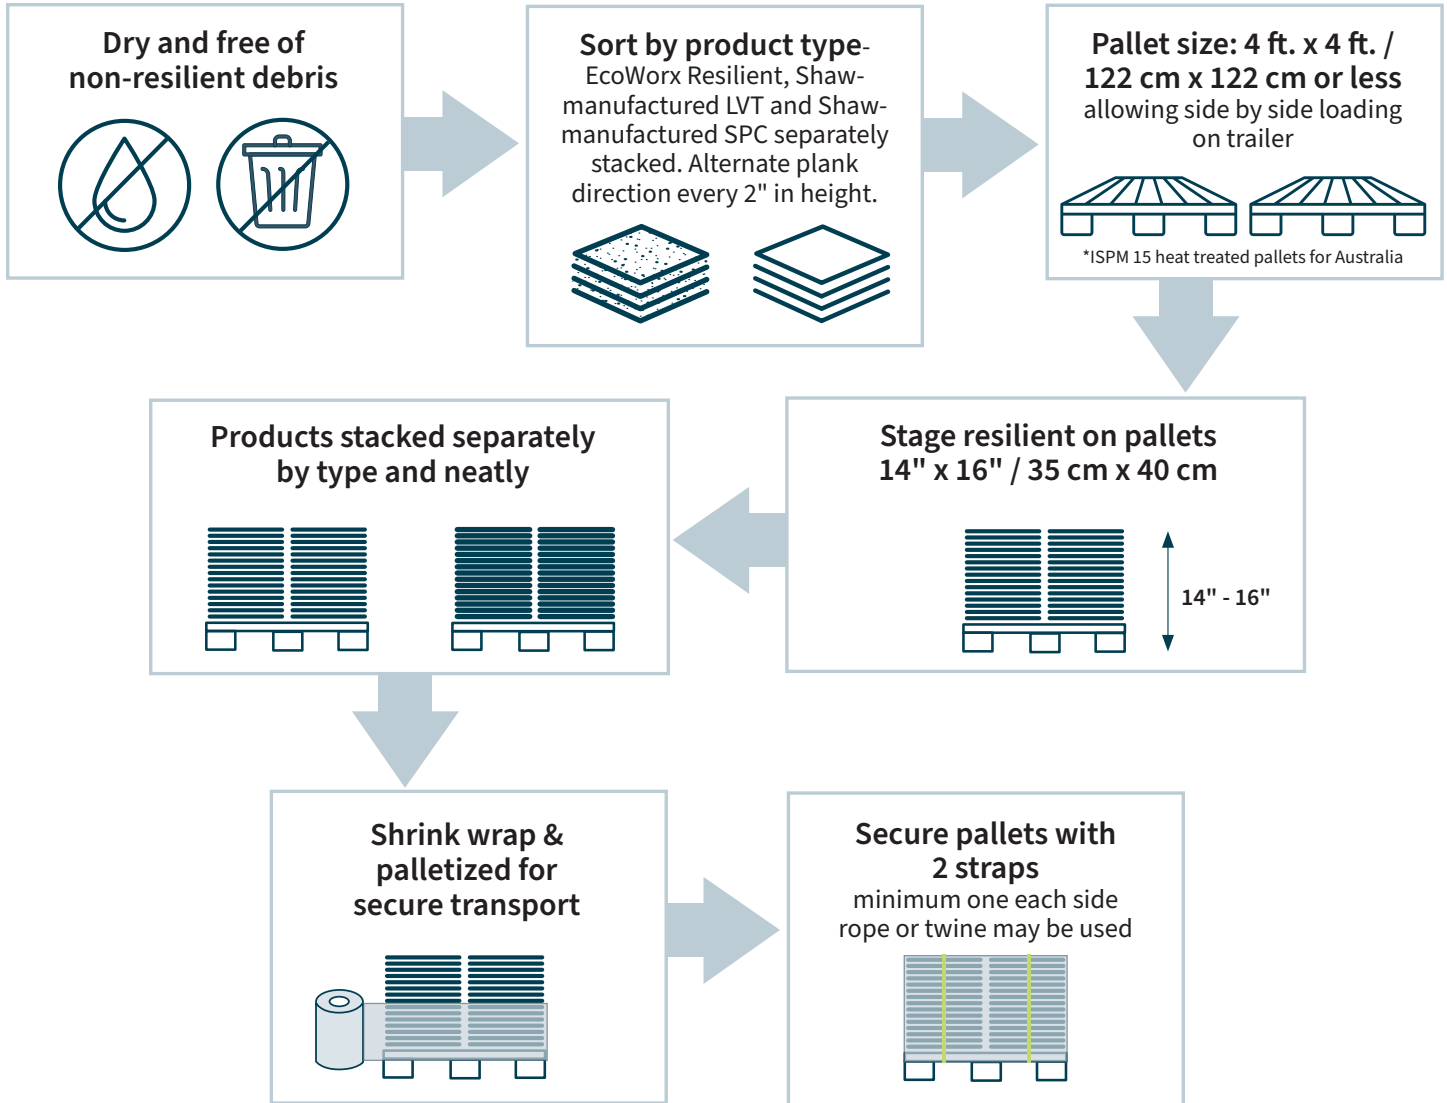

**IMPORTANT TO NOTE:**

- Customer is responsible for preparing the material for shipment.
- Customer must load the trailer to maximize weight, starting in the nose of the trailer and working toward the rear.
- Only approved EcoWorx Resilient or Shaw manufactured resilient (LVT/SPC) may be included in the project. Other resilient flooring will not be accepted.
- Pallets and trailers must be clean of any non-resilient flooring debris (i.e. construction waste, cardboard boxes, trash, excessive glue/adhesive, pieces of subfloor, etc.).
- If trash or other non-resilient flooring debris are present on the load, trash handling and disposal charges will be applied.
  - Material must not contain, asbestos, or adhesives containing asbestos.
  - Bio hazardous or contaminated material will not be accepted.
- Pallets that come apart in transit may result in additional handling charges.